

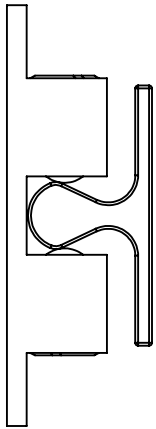
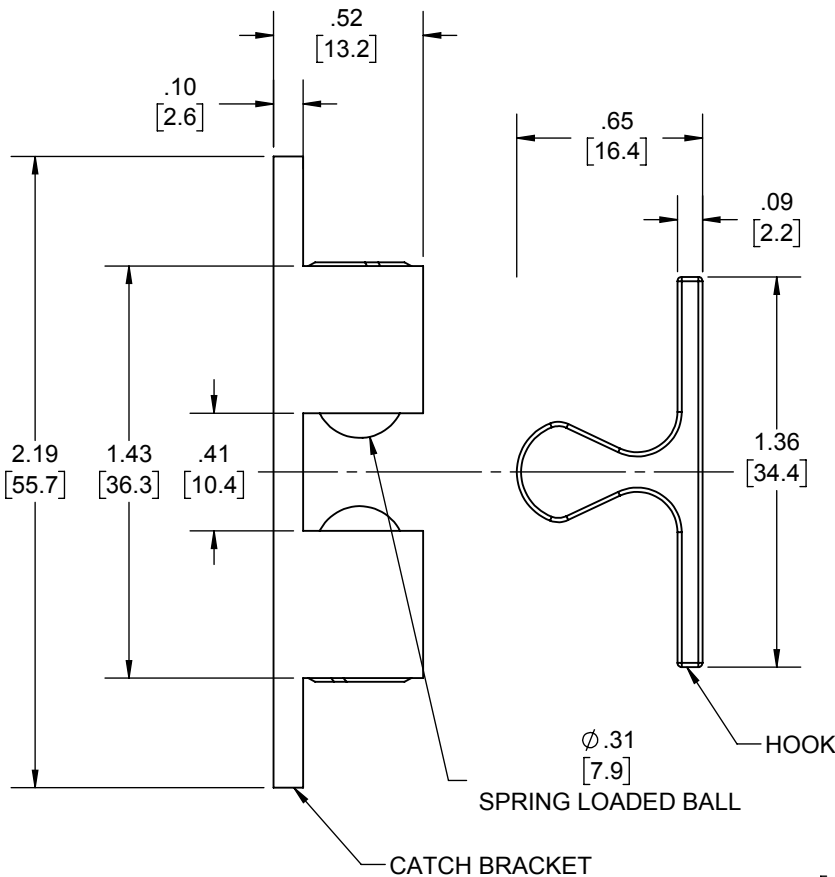
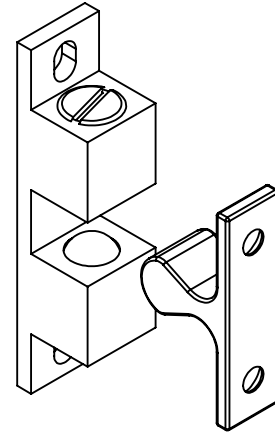


REV.	DESCRIPTION	ECO NO.	DATE
-	INITIAL CHECK IN		10/1/2013



SECURE


THREADED CAP
(TENSION ADJUSTMENT)



SPRING LOADED BALL

HOOK

CATCH BRACKET

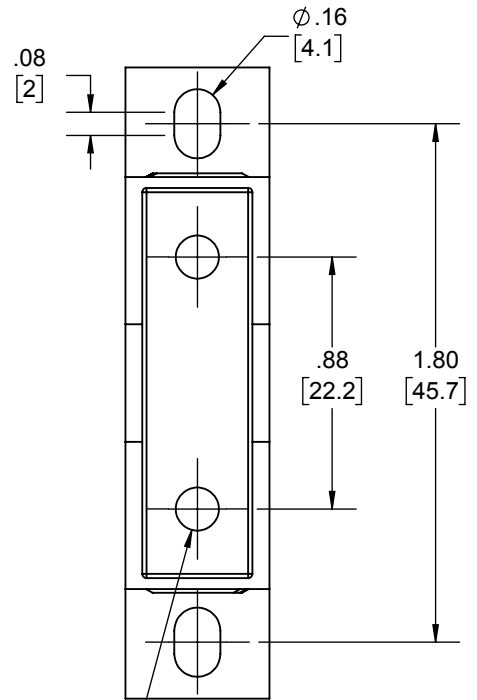

2X Ø .15 [3.8] THRU ALL
✓ Ø .28 [7.1] X 82°

HARDWARE:
(2) #6 x 3/4" FPHSMS
(2) #6 x 3/4" TPHSMS



PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAGER COMPANIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HAGER COMPANIES IS PROHIBITED.

HAGER RESERVES THE RIGHT TO MAKE DESIGN CHANGES WITHOUT NOTICE. CALL HAGER ENGINEERING AT 1-800-325-9995 FOR THE LATEST REVISION DATE OF TEMPLATE.

MATERIAL	Material <not specified>
FINISH	AS SPECIFIED
DO NOT SCALE DRAWING	

DRAWN	MRJ	3/5/2013
ENG. APPR.		
TOLERANCES:		
FRACTIONAL: ±0.015"		
ANGULAR: MACH: ± 1° BEND: ±1°		
TWO PLACE DECIMAL: ±0.01"		
THREE PLACE DECIMAL: ±0.004"		

323S 3 WAY BALL CATCH		
SIZE	DWG. NO.	REV.
A	S-TA01030	-
SCALE: 1:1	WEIGHT: 0.12	SHEET 1 OF 1